

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A A

B B

C C

D D

E E


F F

G G

H H

I I

J J

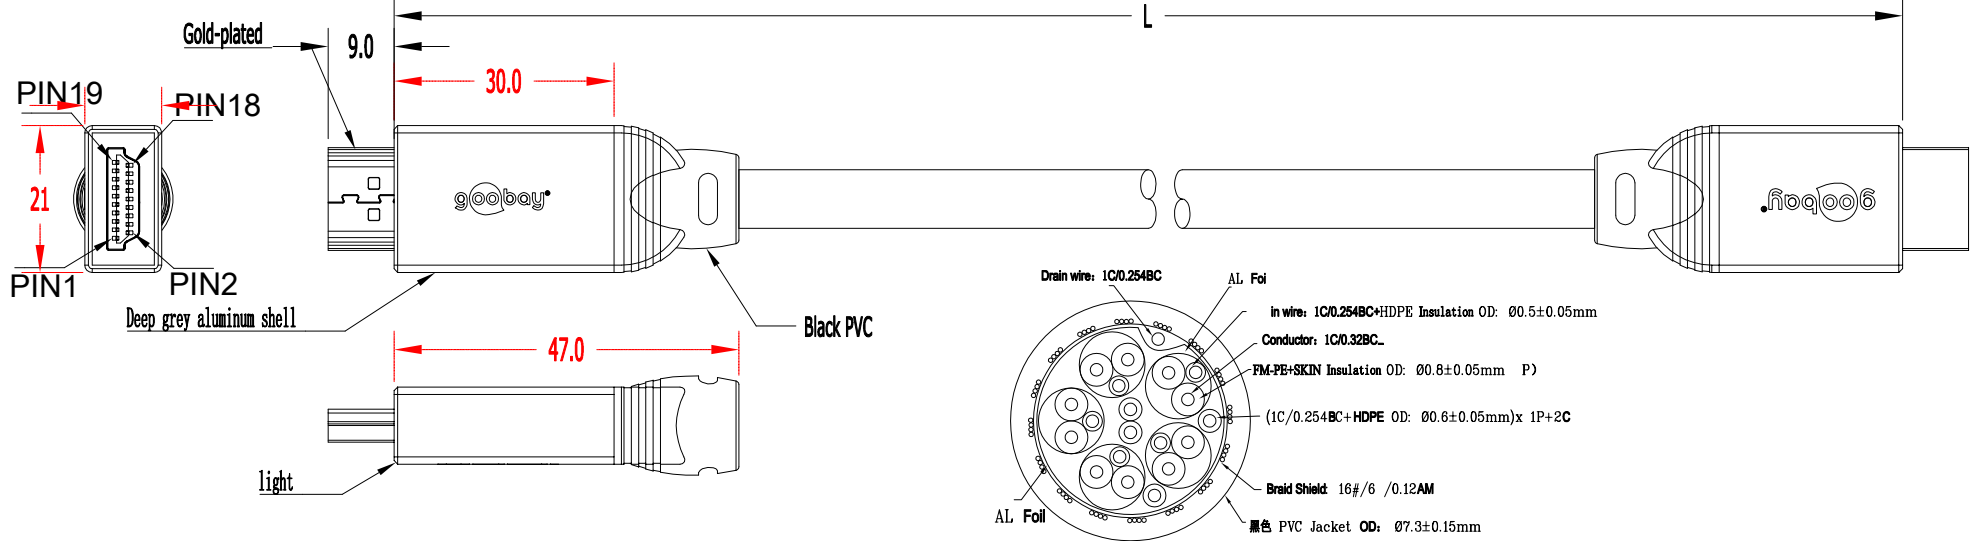

PIN Assignment	
1	TMD5 Data 2+
2	TMD5 Data 2 shield
3	TMD5 Data 2-
4	TMD5 Data 1+
5	TMD5 Data 1 shield
6	TMD5 Data 1-
7	TMD5 Data 0+
8	TMD5 Data 0 shield
9	TMD5 Data 0-
10	TMD5 Clock+
11	TMD5 Clock shield
12	TMD5 Clock-
13	CEC
14	Utility/HEAC+
17	DDC/CEC/HEAC GND
19	HPD/HEAC-
15	SCL
16	SDA
18	5V Power
Shell	Shell

Nr. / No.	Länge / Length (m)
75053	1.0
75603	1.5
75777	2.0
75844	3.0
75919	5.0

HighSpeed HDMI™ Anschlusskabel mit Ethernet

- HighSpeed HDMI™ für 3D und Ultra HD bis 4K@50/60 Hz (2160p)
- vergoldete Kontaktflächen für optimale Signalübertragung
- hochwertige Metallstecker
- optimierter Knickschutz und flexible Kabelummantelung
- Anschlüsse: 2x HDMI-Stecker (Typ A)
- Konformität: RoHS, REACH

HighSpeed HDMI™ connection cable with Ethernet

- HighSpeed HDMI™ for 3D and Ultra HD up to 4K @ 50/60 Hz (2160 p)
- gold-plated contact surfaces for optimum signal transmission
- high-quality metal connectors
- optimised bend protection and flexible cable sleeving
- Connections: 2x HDMI male (Type A)
- Conformity: RoHS, REACH

Änderungen				Datum	Name	Bezeichnung	Blatt	
Datum		Name		gez.: 09.07.2019	tf	HDMI cable 2.0 (4K/60 Hz)	von	
				gepr.: 09.07.2019	tf			
				Norm:	Zeichnungs-Nr.:			
Änderungen vorbehalten / Subject to change								

1 2 3 4 5 6 7 8 9 10 11 12 13 14