


Type Designation	430
Designation IEC	4R25
System	Zn-MnO ₂ (Zinc Chloride)
Shelf Life (Coding)*	3 years
Nominal Voltage [V]	6.0
Typical Capacity C [mAh]	7500 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	545
Volume [ccm]	400

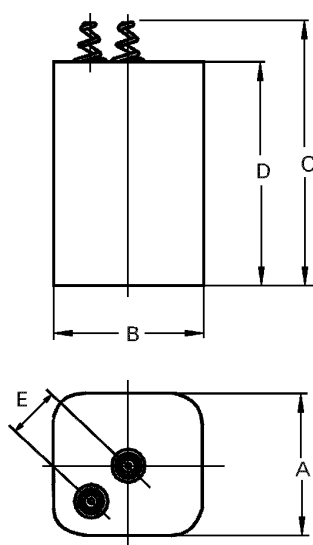

Dimensions [mm]

min: max:

A	65	67
B	65	67
C	108	115
D	97	102
E	23	27

Typical Capacities (at 20°C):

Discharge Type	Load	End Voltage[V]	3.6
Portable lighting	8.2 Ω	Time [h]	7.9
30m/d, 7d/w		Capacity [Ah]	4.2
		Energy [Wh]	18.3
Discharge Type	Load	End Voltage[V]	3.6
Portable lighting	9.1 Ω	Time [h]	8.50
30m/h, 8h/d, 7d/w		Capacity [Ah]	4.06
		Energy [Wh]	17.78
Discharge Type	Load	End Voltage[V]	3.6
Road warning lamps	110 Ω	Time [h]	174
12h/d, 7d/w		Capacity [Ah]	7.5
		Energy [Wh]	37.3

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.



Information	Artikeldetails	
• Kompakte und energiegelade Batterie für dauerhaften Betrieb	Bestellnummer	00430 101 111
	UVP (inkl. MwSt.)	5,49 EUR
	Zolltarifnummer	85061098
	Ursprungsland	China
	IEC	4R25X
	Andere	4R25X
	System	Zinc Chlorid
	Volt	6,0
	Verbrauchereinheit	1
	Verpackungsinformation	OEM

GTIN / EAN



4 0 0 8 4 9 6 1 7 1 3 8 5

Logistikdaten							
		Inhalt (VBE)	GTIN / EAN	Breite (mm)	Tiefe (mm)	Höhe (mm)	Gewicht (kg)
VBE (Verbrauchereinheit)		1	40 08496 171385	67,0	67,0	115,0	0,547
SK2 (Sammelkarton2)							
SK1 (Sammelkarton1)							
VSK (Versandkarton)		20	40 08496 021208	252,0	350,0	166,0	11,284
PAL (Palette)		1080	40 08496 331284	800,0	1200,0	1146,0	630,336
Lagen / Palette	6	Versandkarton / Lage	9	Versandkarton / Palette	54		
Mindestliefermenge / Inhalt (Anzahl VBE)	1						
Generiert am 18.02.2018, 06:56, ZILVP-0001-03							

Generiert am 18.02.2018, 06:56, ZUVP-0001-03

Bei allen aufgeführten Produkten und Abbildungen sind Änderungen vorbehalten.
 Im Falle der Nichtverfügbarkeit von Produkten kann VARTA Consumer Batteries GmbH & Co. KGaA
 nicht verantwortlich gemacht werden. Die Abbildungen können von den Originalprodukten abweichen.
 Länderspezifische Sortimente gemäß Preisliste. Technische Änderungen, Irrtümer und Druckfehler vorbehalten.

VARTA Consumer Batteries GmbH & Co. KGaA | Vertrieb Deutschland | Alfred-Krupp-Str. 9 | 73479 Ellwangen | Deutschland
 Postfach 1363 | 73473 Ellwangen | Deutschland | Telefon (+49) 7961 83 770 | Telefax (+49) 827 827 4

